


IMPORTANT: We have recently identified a compliance issue relating to our calculation and testing of the lambda value of products in our 4000 and 5000 range and the Crown-Bond and Crown-Fix products within Crown Flat Roofing range. Please note that PL4000 manufactured after 15 December 2017 will be marketed from January as Celotex PL3000 with a declared lambda value of 0.023 W/mK. To read the full statement please visit the Celotex website homepage.

Celotex PL4000 is a high performance thermal insulation board where the PIR insulation is bonded to tapered edge plasterboard.

PL4000 is manufactured from rigid polyisocyanurate (PIR) using a blowing agent that has zero ozone depletion potential (zero ODP) and low global warming potential (GWP).

With Celotex PL4000 you are specifying an insulation board that:

- Can be easily used to upgrade to current building regulation standards in pitched roof, flat roof and wall applications
- Ideal option for internal solid wall insulation
- Is suitable for both direct bonding ('dot and dab') and mechanically fixed installation techniques
- Featuring an inbuilt vapour control layer
- 15mm option provides ideal solution for window and door reveals
- Is certified under BBA certificate number 16/5357
- Ofgem approved
- Offers the installer maximum flexibility and installation speed due to the tapered edge plasterboard
- Offers the user the ability to install both the insulation and plasterboard in one operation, thus reducing installation times
- Future proofs the energy performance of new and existing buildings

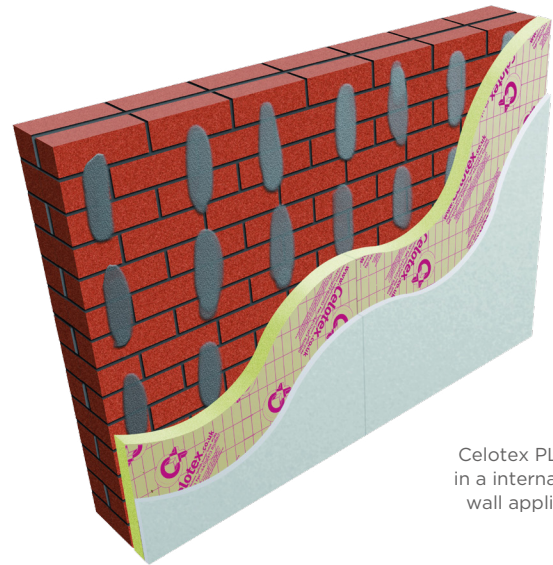

Celotex PL4000 in a internal solid wall application

Applications

Celotex PL4000 can be specified for use in a variety of applications including:

- Solid masonry walls
- The 'underneath' layer of insulation in between and under rafter and joist applications
- Timber frame lining applications

Specification clause

The insulation shall be Celotex PL4000 ___mm thick comprising a polyisocyanurate rigid foam insulation core with a thermal conductivity of 0.022 W/mK with aluminium foil/kraft paper facings on both sides bonded to a layer of tapered edge plasterboard. Celotex PL4000 is CFC/HCFC free with zero ODP and low GWP and CE marking compliant to BS EN 13950. Celotex PL4000 is manufactured in accordance with BS EN 13950 quality management system ISO 9001 and environmental management system ISO 14001. All products must be installed in accordance with instructions issued by Celotex.

Technical data

Thickness (mm)	R-value (m ² K/W)	Weight (kg/m ²)
15 + 12.5	0.70	8.78
25 + 12.5	1.20	9.06
40 + 12.5	1.85	9.52
50 + 12.5	2.30	9.86
60 + 12.5	2.75	10.15
65 + 12.5	3.00	10.30

Physical properties

	Method	PL4000
Compressive strength*	BS EN 826	≥120kPa
Dimensional stability*	BS EN 1604	DS(70,90)3, DS(-20,-)1
Thermal conductivity*	BS EN 12667	0.022 W/mK
Fire resistance	BS EN 13501-1	Euroclass B-s1,d0

*Insulation only

Sustainable insulation

Celotex PIR insulation has been independently assessed by BRE Global and has been accredited with an A+ rating when compared to the BRE Green Guide. The results also show that Celotex offers a lower environmental impact than other typical PIR manufacturers.

For further information about Celotex' sustainable insulation solutions, visit the sustainability pages of the website at celotex.co.uk

A bit about us

Celotex products protect countless buildings the length and breadth of the UK. Providing PIR insulation for over 90 years, our solutions and product development continue to make a difference not just by creating warmth and comfort but by saving energy too. Every day, thousands of professionals choose Celotex. For them, Celotex is insulation. Plus, all Celotex products come with a suite of practical online tools, as well as exceptional personal support and aftercare.

Typical U-values

U-values will vary depending on application. To calculate a specific U-value, please visit our online calculator at celotex.co.uk

Installation guidelines

For Celotex PL4000 installation details please refer to our online 'applications' pages.

Further information

If you wish to contact Celotex, please do so through the 'contact us' page on our website.

For information regarding storage, installation and handling of Celotex products, or for health & safety advice, please refer to our online 'literature' pages.

Celotex has a policy of continuous product development and reserves the right to alter product designs or specifications without prior notice.

Saint-Gobain Construction Products UK Limited trading as Celotex. Registered Office: Saint-Gobain House, Binley Business Park, Coventry CV3 2TT. Registered in England and Wales No 734396